

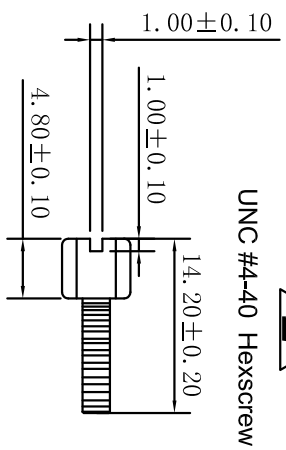


变更标记	日期	变更内容	签名	核准
1	2012.10.15	增加视图	刘峰	
2	2015.11.23	螺丝型号变更	刘峰	

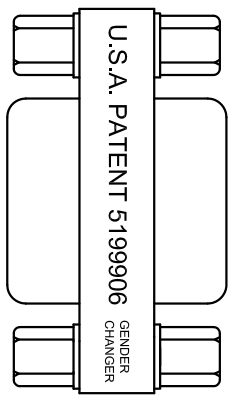





UNC #4-40 Hexnut

HGC 15 F/F GENDER CHANGER
PIN OUT: 15Female 15Female



Label: yellow color with black character
One side: MINI GENDER CHANGER
The other side: U.S.A. PATENT 5199906 GENDER SPECIFICATION
INSULATOR: PBT Glass fibre reinforced UL 94 VO
CONTACT: Brass
CONTACT PLATING: Gold plated over nickel

SHELL: Ni plated shell
CURRENT RATING: 3 AMP
INSULATOR RESISTANCE: 1000 Ω min at 500V DC
TEMPERATURE: -55° C -- +105° C

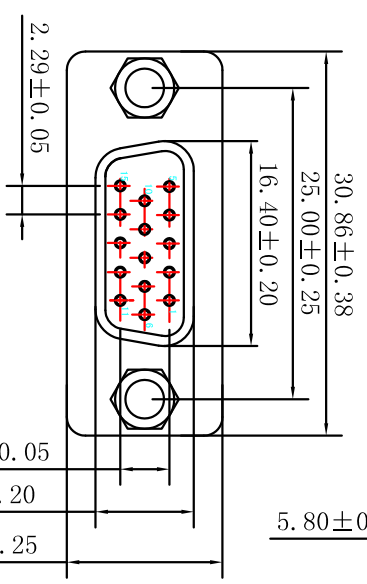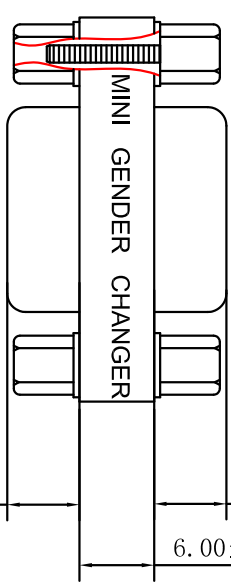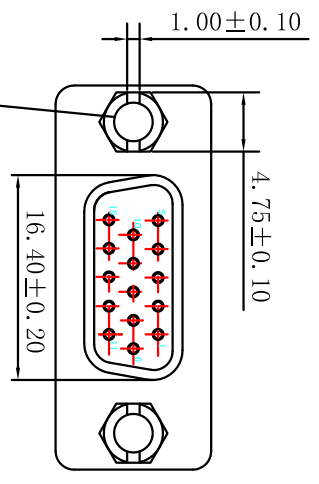

东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差		设计		品名规格	
X.	±0.30	刘峰		HD 15F/15F转接头锁合	
X.X	±0.20	审核		(螺丝14, 2螺母5, 0)	
X.XX	±0.10	核准			
X.XXX	±0.05	单位	mm		
X. ±2°	X.X° ±1°	日期	2012.08.16	图号	YS-111-0074
		比例	1:1	版次	A/2