

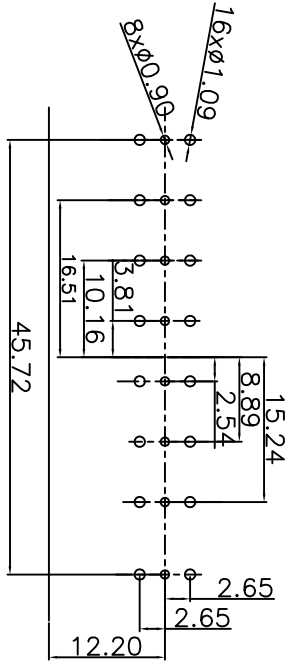
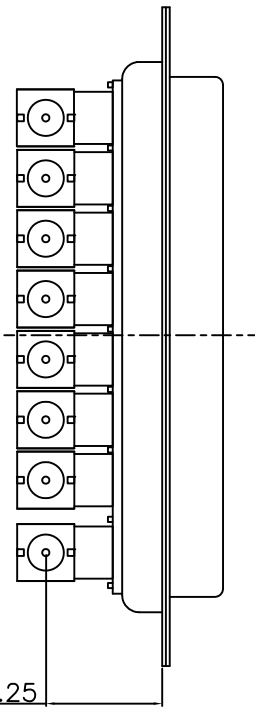


变更标记	日期	变更内容	签名	核准

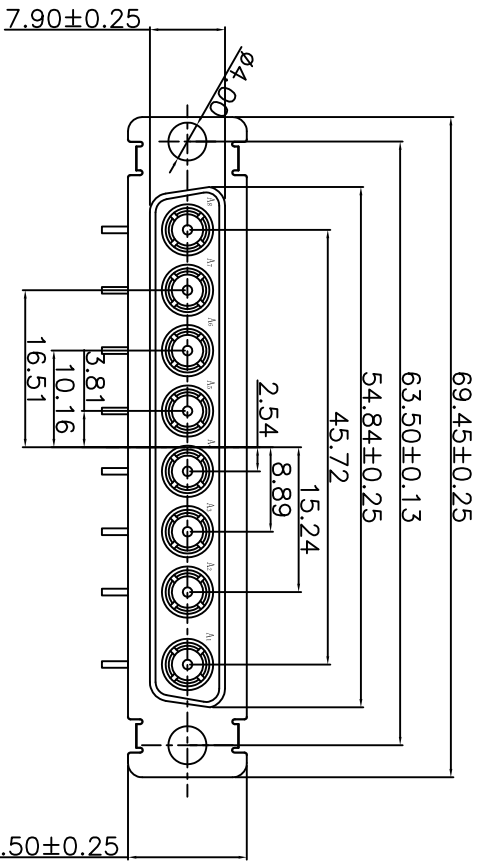

DW-8 F 8 X X 0 A C 0

COLOUR
B:Blue K:Black W:White

SHELL PLATING
A:Gold B:Front Gold and back Tin C:Front Nickel and Back TIN N:Nickel T:Tin 5:Zinc D:CU/ZN/SN

Contact Finish
A:Gold Flash G:Gold Flash3U" D:Gold Flash5U"
E:Gold Flash15U" F:Gold Flash30U" G:Gold T:Tin

MATERIALS AND FINISH

SHELL : BRASS MATERIAL, CU/ZN/5% FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED
HIGH FREQUENCY CONTACT MATERIAL: BRASS, 3U~50u" GOLD PLATED
ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CURRENT RATING :50 OHM.
HIGH FREQUENCY CONTACT RESISTANCE : 2.7 MILLOHMS MAX.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差		设计		品名规格	
X.	±0.30	设计	刘峰	R/A D-SUB 8WS COAXIAL FEMALE 无磁	
XX	±0.20	审核			
XXX	±0.10	核准		料号	DW-8F8xxx0ACC0
XXXX	±0.05	单位	mm	日期	
X° ±2°	XX' ±1°	比例	1:1	图号	YS-11-0111
				版次	A/0