
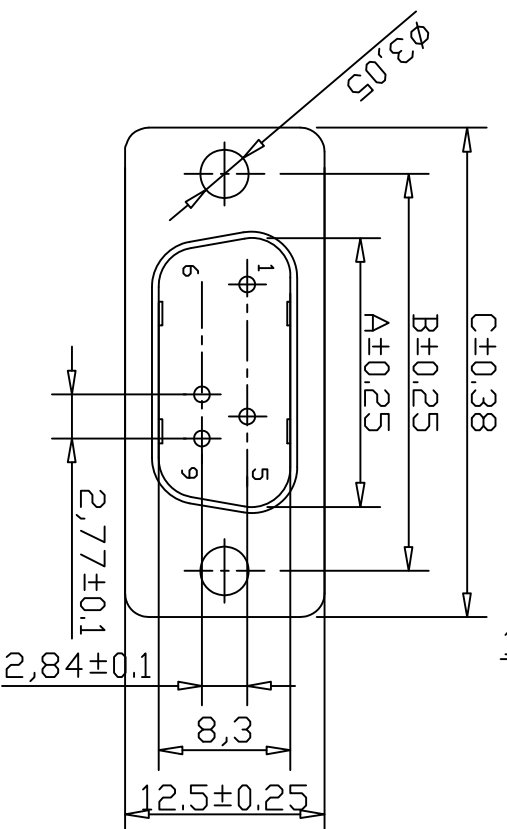
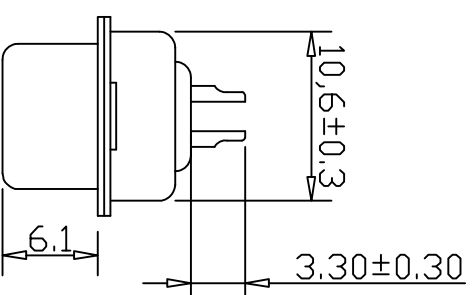


变更标记	日期	变更内容	签名	核准
------	----	------	----	----

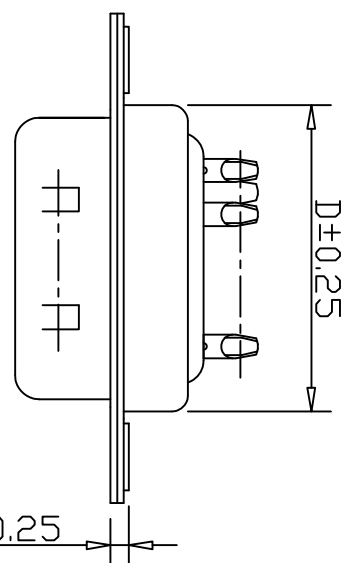

NOTE:
NUMBER OF CONTACT:
09 15 25 37
CURRENT RATING:
5Amp
INSULATOR RESISTANCE:
1000Mh MIN.(at 500V DC)
TEMPERATURE:
-55° C to +105° C
2. MATERIALS:
INSULATOR: PBT+25%GLASSFIBER (UJ94-V0)
PIN CONTACT: BRASS
SHELL: BRASS
SHELL PLATING: Cu/Zn/Sn 100U"
PIN CONTACT: Gold Flash

	A	B	C	D
09	16.9	25.0	30.8	19.0
15	25.35	33.5	39.2	27.7
25	39.0	47.0	53.0	41.0
37	55.4	63.5	69.4	57.3

DB-x P x V x D x A 0 0

Pin: 09 15 25 37

COLOUR
B: Blue K: Black W: White 2: 661C
blue 3: 235C Red 4: 322C green
6: 131CYellow

Contact Finish
A: Gold Flash C: Gold Flash3U" D: Gold Flash5U" E: Gold Flash15U"
F: Gold Flash30U" 6: Gold T: Tin



东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差	设计	刘峰	品名规格	DB-传统公母线式(无磁)		
X. ±0.30	审核		料号	HD-xPxVxDxA00	型号	
XX ±0.20	核准		日期	2012-09-03	图号	
X.XX ±0.10	单位	mm	比例	1:1	版次	A/0
X.XXX ±0.05						
X.° ±2° X.X° ±1°						