
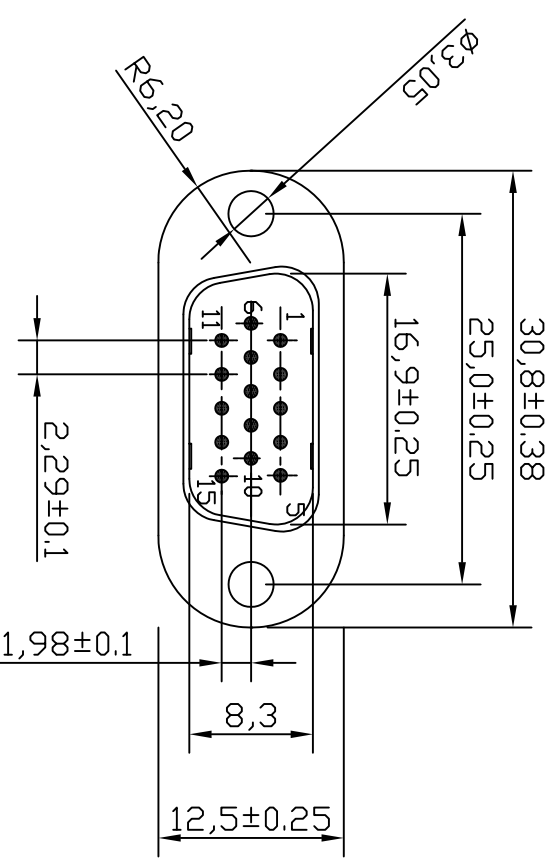
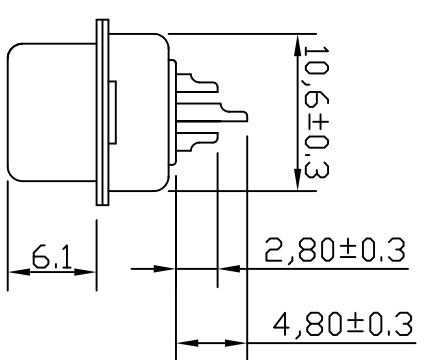


变更标记	日期	变更内容	签名	核准

Material & finish  
SHELL:

steel  
Zinc plated, Tin plated  
or Nickel plated steel  
PIN CONTACT:  
Phosphor bronze or brass  
Gold Plated  
INSULATOR:  
PBT & Glass-fibre reinforced  
UL-94-V0  
NUMBER OF CONTACT:  
15 26 44 62  
CURRENT RATING:  
3Amp  
INSULATOR RESISTANCE:  
1000Mn MIN.(at 500V DC)  
TEMPERATURE:  
-55°C to +105°C

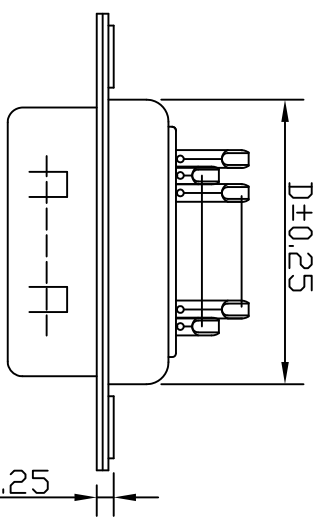

Pin: 15 26 44 62

颜色  
B:蓝色 K:黑色 W:白色 2:6610C蓝  
3:2350C红 4: 3220C绿 6: 1310C黄

V:防火 0: 不防火

HD-X P X X X X X A 1 7

铁壳电镀  
A:金 B:前金后锡 C:前镍后锡 N:镍 T:锡 5:五彩

端子电镀  
A:半金锡G/F C:半金3U" D:半金5U" E:半金15U" F:半金30U"  
G:全金 T:全锡

A	B	C	D	E
15	16.9	25.0	30.8	19.0
26	25.35	33.3	39.2	27.7
44	39.0	47.0	53.0	41.0
62	55.4	63.5	69.4	57.3
				2.29
				2.29
				2.41

**东莞扬顺五金电子有限公司**  
Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差

X	±0.30	设计	韩云	品名规格	HD-公传统公焊线式铁壳半圆
XX	±0.20	审核	雷永兴	料号	HD-xPxxxxx17
X.XX	±0.10	核准		日期	2012-12-02
X.XXX	±0.05	单位	mm	图号	YS-11-0098
X° ±2° XX' ±1'		比例	1:1	版次	A/0