



变更标记	日期	变更内容	签名	核准

Material & finish
SHELL:

steel
Zinc plated, Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass—fibre reinforced

UL-94-V0
NUMBER OF CONTACT:
09 15 25 37
CURRENT RATING:
3amp

INSULATOR RESISTANCE:
1000M_n MIN.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

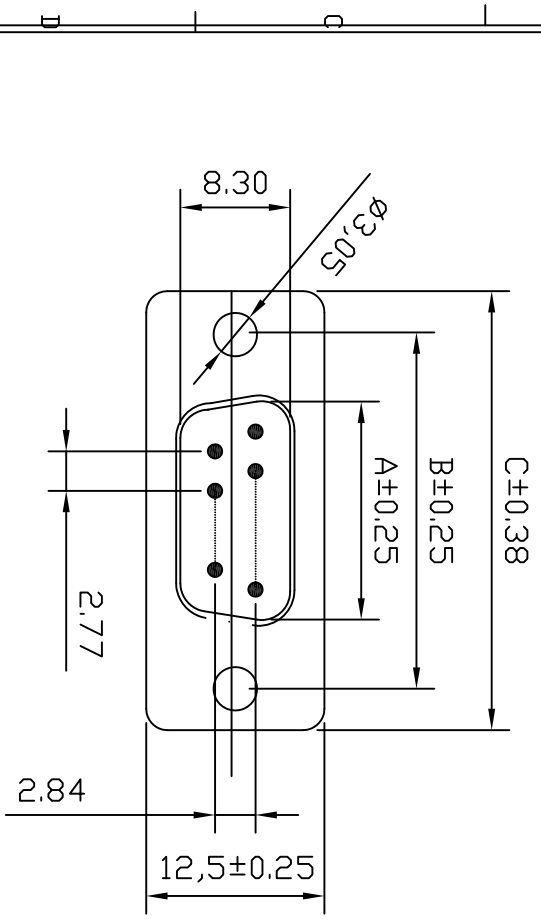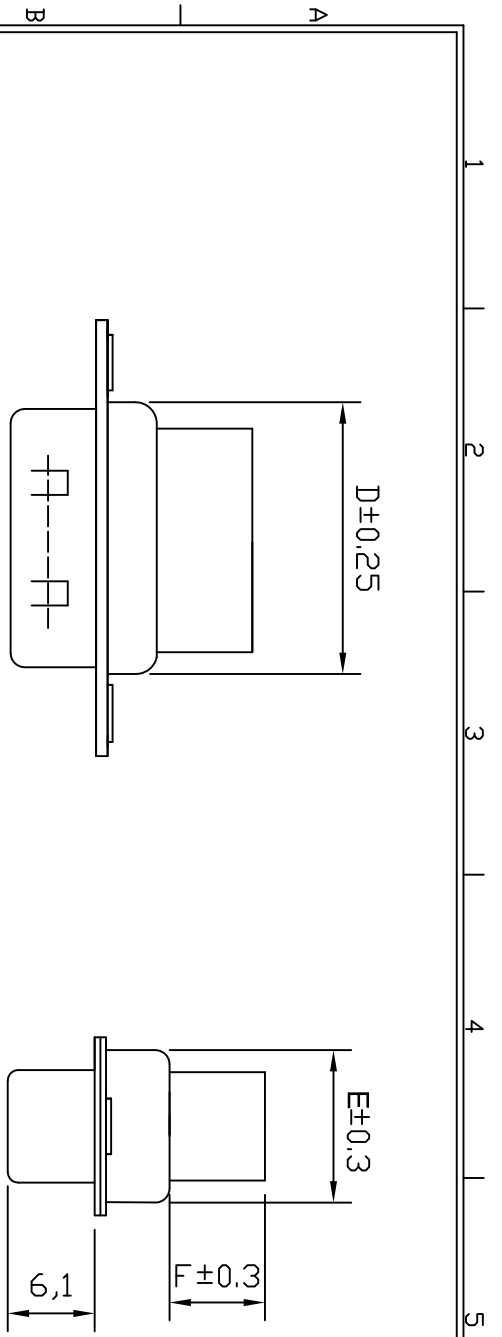

	A	B	C	D	E	F
09	16.9	25.0	30.8	19.0	10.6	6.3
15	25.35	33.5	39.2	27.7	10.6	6.4
25	39.0	47.0	53.0	41.0	10.6	6.5
37	55.4	63.5	69.4	57.3	10.6	6.2

DH-x P x V 0 x x A 0 0

Pin: 09 15 25 37 50
COLOUR
B: Blue K: Black W: White 2: 661C
blue 3: 235C Red 4: 322C green
6: 131C Yellow

SHELL PLATING
A: Gold B: Front Gold and back Tin C: Front Nickel and
Back TIN N: Nickel T: Tin 5: Zinc D: CU/ZN/SN (SHELL: C2680)



东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差	设计	刘峰	品名规格	D-SUB CRIMP 传统公		
X. ±0.30	审核		料号	DH-xPxV0xxxA00	型号	D-SUB 9-37P1in
XX ±0.10	核准		日期	2012-09-03	图号	YS-11-0063
XXX ±0.05	单位	mm	比例	1:1	版次	A/0
X ^o ±2° X ^o ±1°						