
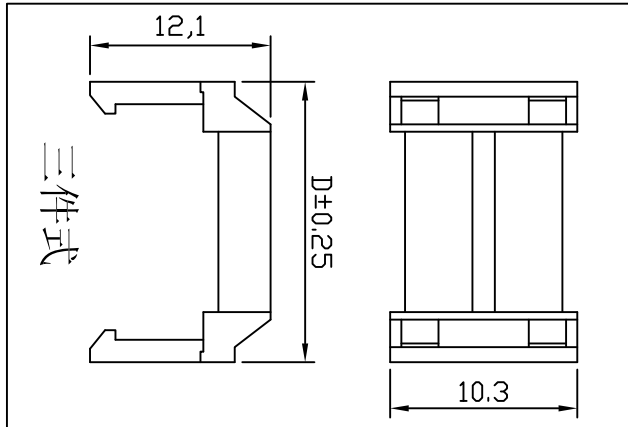
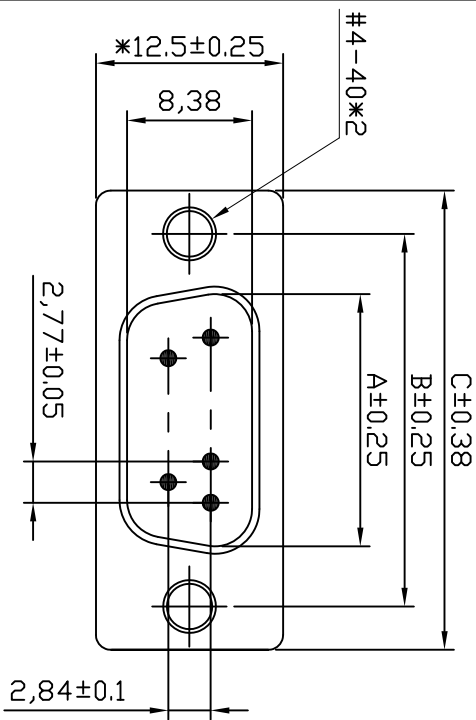
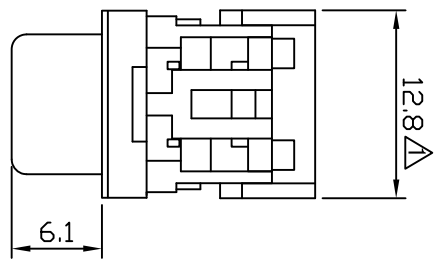


变更标记	日期	变更内容	签名	核准
△	2016.04.21	尺寸变更	刘峰	

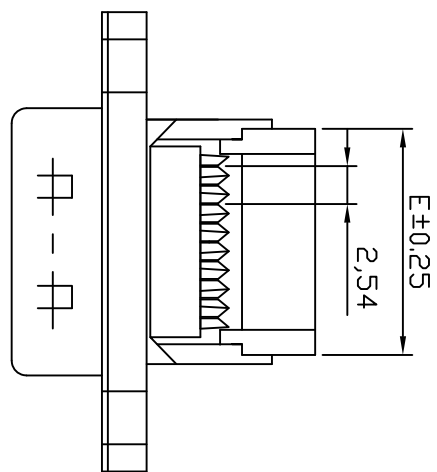

Positions	A	B	C	D	E
09	16.92	24.99	30.81	18.80	15.3△
15	25.25	33.32	39.14	26.90	23.6
25	38.80	47.04	53.04	40.30	37.2
37	55.45	63.50	69.32	56.95	53.75

Material & finish  
 SHELL:  
 steel  
 Zinc plated, Tin plated  
 or Nickel plated steel  
 INSULATOR:  
 PBT & Glass-fibre reinforced  
 UL-94-V0  
 PIN CONTACT:  
 Phosphor bronze Gold FLASH  
 CURRENT RATING:  
 1Amp  
 INSULATOR RESISTANCE:  
 500Mh MIN. (at 500V DC)  
 TEMPERATURE:  
 -55° C to +105° C

DF-X P X V X X B O A B  
 Pin: 09 15 25 37  
 COLOUR  
 B: Blue K: Black W: White 2:6610  
 blue 3:235C Red 4:322C green  
 6:131CYellow Z:Grey  
 SHELL PLATING  
 A: Gold N: Nickel T: Tin S: Zinc  
 Contact Finish  
 A: Gold Flash G: Gold Flash3U D: Gold Flash5U E: Gold Flash15U  
 F: Gold Flash30U G: Gold T: Tin

**东莞扬顺五金电子有限公司**  
 Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差

X.	±0.30	设计	刘峰	品名规格	D-SUB IDC MALE
X.X	±0.25	审核		料号	DF-xPxVxxB0AB
X.XX	±0.15	核准		日期	2016.04.21
X.XXX	±0.05	单位	mm	图号	YS-11-0061
X° ±3°	X.X° ±1°			比例	1:1
				版次	A/1