
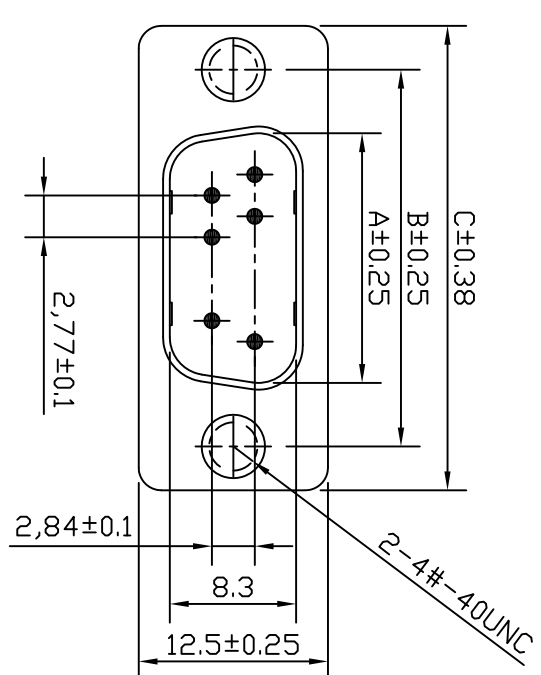



变更标记	日期	变更内容	签名	核准

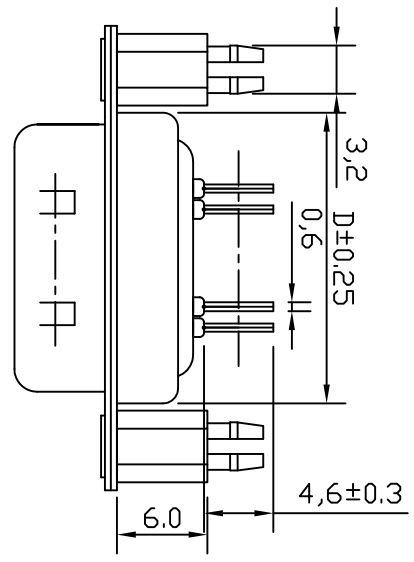


	A	B	C	D
09	16.9	25.0	30.8	19.0
15	25.35	33.5	39.2	27.7
25	39.0	47.0	53.0	41.0
37	55.4	63.5	69.4	57.3

Material & finish
SHELL:
steel
Zinc plated, Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0
NUMBER OF CONTACT:
09 15 25 37
CURRENT RATING:
3Amp
INSULATOR RESISTANCE:
1000Mh MIN.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

DS1-X P X V X X X E 0 0

Pin:09 15 25 37
COLOUR
B:Blue K:Black W:White 2:6610
blue 3:235C Red 4:322C green
6:131CYellow

SHELL PLATING
A:Gold B:Front Gold and back Tin C:Front Nickel and
Back TIN N:Nickel T:Tin 5:zinc DCUZN/5N
Contact Finish
A:Gold Flash C:Gold Flash3U D:Gold Flash5U E:Gold Flash15U
F:Gold Flash30U G:Gold T:TIN


东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差	设计 <i>liyongxin</i>		品名规格	D-SUB 180度传统公后脚6.0鱼叉
X. ±0.30	审核 雷永兴	料号 DS1-xP-VxxxxE00	型号	D-SUB 9-37Pin
XX ±0.20	核准	日期 2012.09.03	图号	YS-11-0048
XXX ±0.10	单位 mm	比例 1:1	版次	A/0
XXXX ±0.05				
X° ±2° XX' ±1°				