


变更标记	日期	变更内容	签名	核准
------	----	------	----	----

Material & finish
SHELL:

steel
Zinc plated, Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0

NUMBER OF CONTACT:
15 26 44 62
CURRENT RATING:
3Amp

INSULATOR RESISTANCE:
1000Mh MIN.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

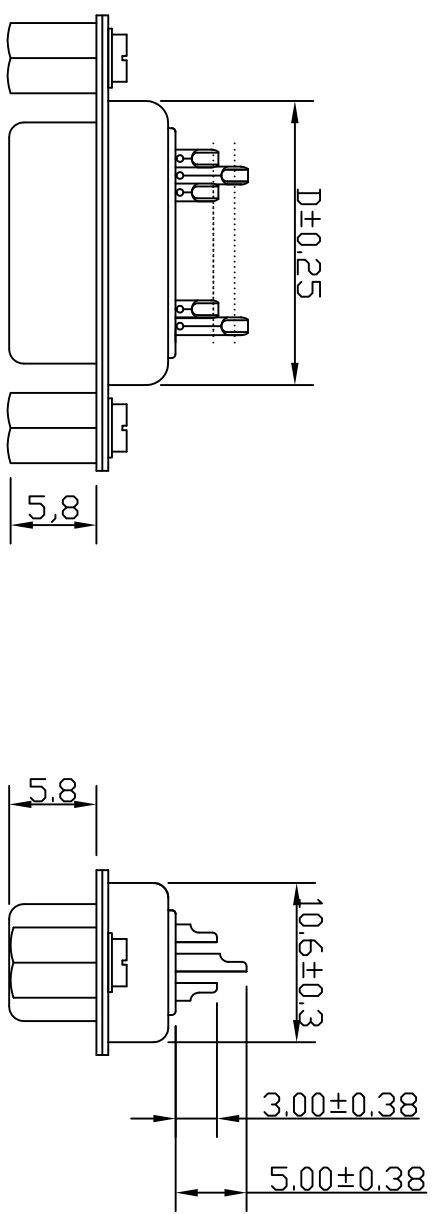

	A	B	C	D	E
15	16.25	25.0	30.8	19.0	2.29
26	24.8	33.3	39.2	27.7	2.29
44	38.3	47.0	53.0	41.0	2.29
62	54.8	63.5	69.4	57.3	2.41

HD-X S X V X X X D 0 0

Pin: 15 26 44 62
COLOUR
B: Blue K: Black W: White 2: 661C
blue 3: 235C Red 4: 322C green
6: 131C Yellow

SHELL PLATING
A: Gold B: Front Gold and back Tin C: Front Nickel and
Back TIN N: Nickel T: Tin 5: Zinc D: CU/ZN/SN

Contact Finish
A: Gold Flash C: Gold Flash3U" D: Gold Flash5U" E: Gold Flash15U"
F: Gold Flash30U" G: Gold T: Tin



东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差	设计	刘峰	品名规格	HD-传统母前脚5.8六角实芯螺母焊线式
X. ± 0.30	审核	layongxin	料号	HD-XSXXVXXD00
XX ± 0.20	核准		日期	2012-09-03
XXX ± 0.10	单位	mm	图号	YS-11-0025
XXXX ± 0.05			比例	1:1
X° $\pm 2^\circ$ XX° $\pm 1^\circ$			版次	A/0