


Material & finish
 SHELL:
 steel
 Zinc plated, Tin plated
 or Nickel plated steel
 PIN CONTACT:
 Phosphor bronze or brass
 Gold Plated
 INSULATOR:
 PBT & Glass-fibre reinforced
 UL-94-V0
 NUMBER OF CONTACT:
 09 15 25 37
 CURRENT RATING:
 3amp
 INSULATOR RESISTANCE:
 1000Mn MIN.(at 500V DC)
 TEMPERATURE:
 -55°C to +105°C

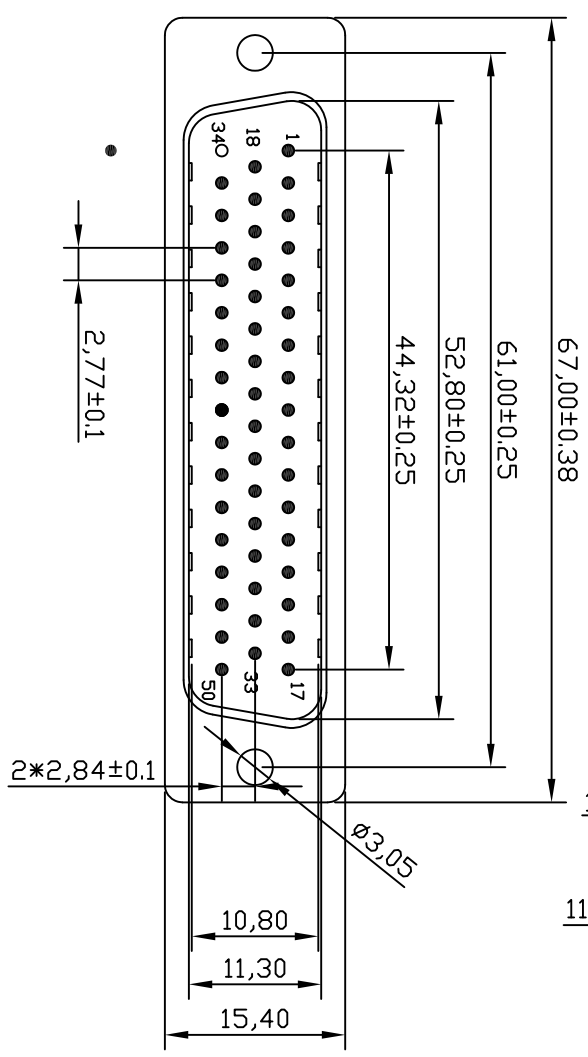

DB-50 P X V X D A 0 0

COLOUR
 B: Blue K: Black W: White 2: 6616
 blue 3: 235C Red 4: 322C green
 5: 131CV41W

SHELL PLATING
 A: Gold B: Front Gold and back Tin C: Front Nickel and
 Back Tin N: Nickel T: Tin 5: Zinc D: CU/ZNSN

Contact Finish
 A: Gold Flash C: Gold Flash3U D: Gold Flash5U E: Gold Flash15U
 F: Gold Flash20U G: Gold T: Tin



东莞扬顺五金电子有限公司
 Dong Guan City Yang Shun Hardware Electron Co., Ltd

X.X	±0.30		
X.XX	±0.20		
X.XXX	±0.10		
X.° ±2° X.X° ±1°	±0.05		
		DB-50P*V*XXDA00	
		2012.09.03	
		比例 1:1	

A B C D E 1 2 3 4 5 6 7