


变更标记	日期	变更内容	签名	核准

Material & finish  
SHELL:

steel  
Zinc plated, Tin plated  
or Nickel plated steel  
PIN CONTACT:  
Phosphor bronze or brass  
Gold Plated  
INSULATOR:  
PBT & Glass-fibre reinforced

UL-94-V0  
NUMBER OF CONTACT:  
09 15 25 37  
CURRENT RATING:  
3Amp

INSULATOR RESISTANCE:  
1000Mh MIN.(at 500V DC)  
TEMPERATURE:  
-55°C to +105°C

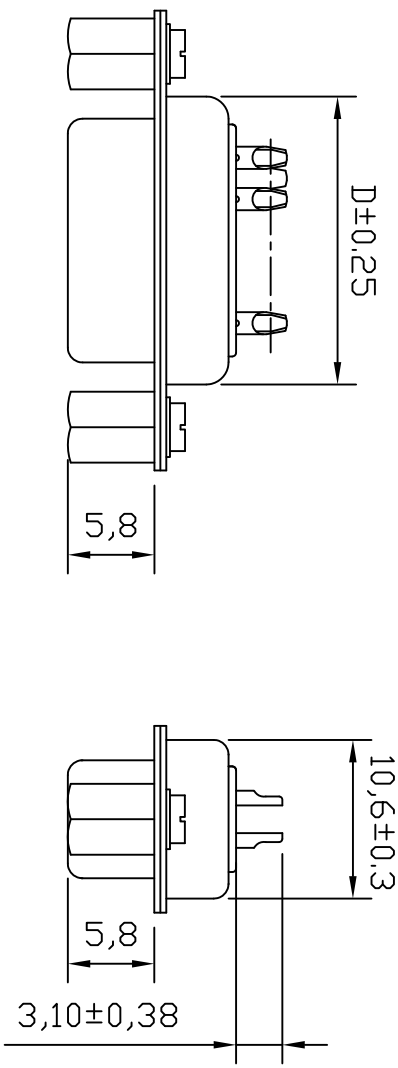

	A	B	C	D
09	16.25	25.0	30.8	19.0
15	24.8	33.3	39.2	27.7
25	38.3	47.0	53.0	41.0
37	54.8	63.5	69.4	57.3

**DB-X S X V X X X D 0 0**

Pin: 09 15 25 37  
COLOUR  
B: Blue K: Black W: White 2: 6610  
blue 3: 235C Red 4: 322C green  
6: 1310Yellw

SHELL PLATING  
A: Gold B: Front Gold and back Tin C: Front Nickel and  
Back TIN N: Nickel T: Tin 5: Zinc D: CU/ZN/NSN

Contact Finish  
A: Gold Flash C: Gold Flash3U" D: Gold Flash5U" E: Gold Flash15U"  
F: Gold Flash30U" G: Gold T: Tin



**东莞扬顺五金电子有限公司**  
Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差	设计	品名规格	D-SUB传统母焊线式前脚5.8实芯螺母		
X ±0.30	审核				
X.X ±0.20	核准	料号	DB-xSxxxxxD00	型号	D-SUB 9-37Pin
X.XX ±0.10	单位	日期	2012.09.03	图号	YS-11-0007
X.XXX ±0.05		比例	1:1	版次	A/0
X° ±2° X.X° ±1°					